




WÜRTH BAER SUPPLY COMPANY

Sugatsune Premium Hardware Catalog

Table of Contents

Pocket Door Hardware	2-5
Lid Stays	6-8
Concealed Door Hinges.....	9-10
Lateral Door Opening Systems.....	11
Concealed Cabinet Hinges.....	12-13
Drawer Slides & Folding Brackets.....	14
Door Straighteners & Hasps.....	15
Catches	16
Latches	17
Hooks.....	18
Edge Pulls.....	19

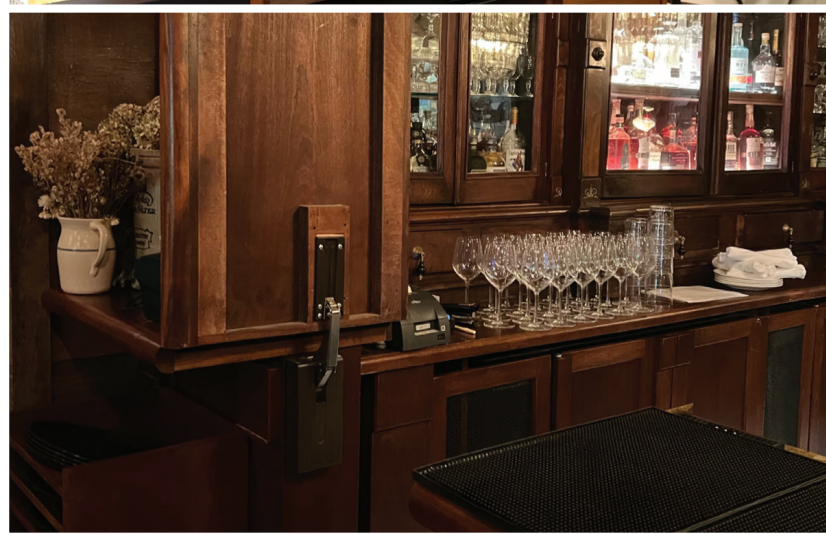

Pocket Door Systems - Overlay Short Height Doors



ALT-ST15-D10 Small (Type S) & Medium (Type M) Height Doors

- Door alignment adjustability, overlay amount is up to 3/8"
- Hanging angle of the door can be adjusted to counteract and prevent door sag
- Type ST15 allows door to retract further into cabinet than type ST20
- Type S door height: 19-11/16" - 27-9/16"
- Type M door height: 27-9/16" - 35-7/16"
- Type S/M door sizes: thickness = 11/16"-13/16", maximum width = 24"
- Type S/M door maximum weight: 19.8 lbs.

Kit Includes: (2) Slides, (1) synchronized board, (2) hinges/mounting plates, (2) mounting plates, (1) damper/base, (2) stoppers, (2) protectors, (2) catches, (2) rollers, (2) roller brackets, (2) insert female screws, (2) g-type sliding tack, & (1) adjustment bolt (Type S) / (2) adjustment bolts (Type M)

Sold In: Per Kit

Min. Cab. Depth	Type S Item #	Type M Item #
16-9/16"	SLALTST15D10S16	SLALTST15D10M16
19-1/2"	SLALTST15D10S19	SLALTST15D10M19
22-1/2"	SLALTST15D10S22	SLALTST15D10M22
24-1/2"	SLALTST15D10S24	SLALTST15D10M24
28-9/16"	SLALTST15D10S28	SLALTST15D10M28



ALT-ST15-D10 Large (Type L) & X-Large (Type LL) Height Doors

- Door alignment adjustability, overlay amount is up to 3/8"
- Hanging angle of the door can be adjusted to counteract and prevent door sag
- Type ST15 allows door to retract further into cabinet than type ST20
- Type L door height: 35-7/16" - 47-1/4"
- Type LL door height: 47-1/4" - 63"
- Type L/LL door sizes: thickness = 11/16"-13/16", maximum width = 24"
- Type L/LL door maximum weight: 33 lbs.

Kit Includes: (4) Slides, (1) synchronized board, (3) hinges/mounting plates, (3) mounting plates, (1) damper/base, (3) stoppers, (2) protectors, (3) catches, (2) rollers, (2) roller brackets, (2) insert female screws, (2) g-type sliding tacks, & (2) adjustment bolts

Sold In: Per Kit

Min. Cab. Depth	Type L Item #	Type LL Item #
16-9/16"	SLALTST15D10L16	SLALTST15D10LL16
19-1/2"	SLALTST15D10L19	SLALTST15D10LL19
22-1/2"	SLALTST15D10L22	SLALTST15D10LL22
24-1/2"	SLALTST15D10L24	SLALTST15D10LL24
28-9/16"	SLALTST15D10L28	SLALTST15D10LL28

Pocket Door Systems - Inset Short Height Doors



ALT-ST15-D360 Small (Type S) & Medium (Type M) Height Doors

- Hanging angle of the door can be adjusted to counteract and prevent door sag
- Type ST15 allows door to retract further into cabinet than type ST20
- Type S door height: 19-11/16" - 27-9/16"
- Type M door height: 27-9/16" - 35-7/16"
- Type S/M door sizes: thickness = 11/16"-1-3/16", maximum width = 24"
- Type S/M door maximum weight: 19.8 lbs.

Kit Includes: (2) Slides, (1) synchronized board, (2) hinges/mounting plates, (2) mounting plates, (2) guide roller, (2) catches, (2) rollers, (2) roller brackets, (2) insert female screws, (2) g-type sliding tacks, & (1) adjustment bolt (Type S) / (2) adjustment bolts (Type M)

Sold In: Per Kit

Min. Cab. Depth	Type S Item #	Type M Item #
16-1/4" + Door Thickness	SLALTST15D360S16	SLALTST15D360M16
19-3/16" + Door Thickness	SLALTST15D360S19	SLALTST15D360M19
22-3/16" + Door Thickness	SLALTST15D360S22	SLALTST15D360M22
24-3/16" + Door Thickness	-	SLALTST15D360M24
28-1/4" + Door Thickness	SLALTST15D360S28	-



ALT-ST15-D360 Large (Type L) & X-Large (Type LL) Height Doors

- Hanging angle of the door can be adjusted to counteract and prevent door sag
- Type ST15 allows door to retract further into cabinet than type ST20
- Type L door height: 35-7/16" - 47-1/4"
- Type LL door height: 47-1/4" - 63"
- Type L/LL door sizes: thickness = 11/16"-1-3/16", maximum width = 24"
- Type L/LL door maximum weight: 33 lbs.

Kit Includes: (4) Slides, (1) synchronized board, (3) hinges/mounting plates, (3) mounting plates, (3) guide rollers, (3) catches, (2) rollers, (2) roller brackets, (2) insert female screws, (2) g-type sliding tacks, & (2) adjustment bolts

Sold In: Per Kit

Min. Cab. Depth	Type L Item #	Type LL Item #
16-1/4" + Door Thickness	SLALTST15D360L16	SLALTST15D360LL16
19-3/16" + Door Thickness	SLALTST15D360L19	SLALTST15D360LL19
22-3/16" + Door Thickness	SLALTST15D360L22	SLALTST15D360LL22
24-3/16" + Door Thickness	SLALTST15D360L24	SLALTST15D360LL24
28-1/4" + Door Thickness	SLALTST15D360L28	SLALTST15D360LL28

Pocket Door Systems - Overlay Tall Height Doors



ALT-ST20-D10 Small (Type S) & Medium (Type M) Height Doors

- Door alignment adjustability, overlay amount is up to 3/8"
- Hanging angle of the door can be adjusted to counteract and prevent door sag
- Type S door height: 31-1/2" - 47-1/4" / Type M door height: 47-1/4" - 63"
- Type S/M door sizes: thickness = 11/16"-13/16", maximum width = 24"
- Type S door max. weight: 19.8 lbs. / Type M door max. weight: 33 lbs.

Type S Kit Includes: (2) Slides, (1) synchronized board, (1) coupling plate, (2) hinges/mounting plates, (2) mounting plates, (1) damper/base, (2) stoppers, (2) protectors, (2) catches, (2) rollers, (2) roller brkts, (2) insert female screws, (2) g-type sliding tacks, & (1) adj. bolt

Type M Kit Includes: (3) Slides, (1) synchronized board, (1) coupling plate, (3) hinges/mounting plates, (3) mounting plates, (1) damper/base, (2) stoppers, (2) protectors, (2) catches, (2) rollers, (2) roller brkts, (2) insert female screws, (2) g-type sliding tacks, & (2) adj. bolts

Sold In: Per Kit

Min. Cab. Depth	Type S Item #	Type M Item #
16-9/16"	SLALTST20D10S16	SLALTST20D10M16
19-1/2"	SLALTST20D10S19	SLALTST20D10M19
22-1/2"	SLALTST20D10S22	SLALTST20D10M22
24-1/2"	SLALTST20D10S24	SLALTST20D10M24
28-9/16"	SLALTST20D10S28	SLALTST20D10M28



ALT-ST20-D10 Large (Type L) & X-Large (Type LL) Height Doors

- Door alignment adjustability, overlay amount is up to 3/8"
- Hanging angle of the door can be adjusted to counteract and prevent door sag
- Type L door height: 63" - 78-3/4" / Type LL door height: 78-3/4" - 94-1/2"
- Type L/LL door sizes: thickness = 11/16"-13/16", maximum width = 24"
- Type L/LL door maximum weight: 44 lbs.

Type L Kit Includes: (4) Slides, (1) synchronized board, (1) coupling plate, (4) hinges/mounting plates, (4) mounting plates, (1) damper/base, (3) stoppers, (2) protectors, (3) catches, (2) rollers, (2) roller brkts, (2) insert female screws, (2) g-type sliding tacks, & (2) adj. bolts

Type LL Kit Includes: (4) Slides, (1) synchronized board, (1) coupling plate, (5) hinges/mounting plates, (5) mounting plates, (1) damper/base, (3) stoppers, (2) protectors, (3) catches, (2) rollers, (2) roller brkts, (2) insert female screws, (2) g-type sliding tacks, & (2) adj. bolts

Sold In: Per Kit

Min. Cab. Depth	Type L Item #	Type LL Item #
16-9/16"	SLALTST20D10L16	SLALTST20D10LL16
19-1/2"	SLALTST20D10L19	SLALTST20D10LL19
22-1/2"	SLALTST20D10L22	SLALTST20D10LL22
24-1/2"	SLALTST20D10L24	SLALTST20D10LL24
28-9/16"	SLALTST20D10L28	SLALTST20D10LL28

Pocket Door Systems - Inset Tall Height Doors



ALT-ST20-D360 Small (Type S) & Medium (Type M) Height Doors

- Hanging angle of the door can be adjusted to counteract and prevent door sag
- Type S door height: 31-1/2" - 47-1/4" / Type M door height: 47-1/4" - 63"
- Type S/M door sizes: thickness = 11/16"-1-3/16", maximum width = 24"
- Type S door maximum weight: 19.8 lbs. / Type M door maximum weight: 33 lbs.

Type S Kit Includes: (2) Slides, (1) synchronized board, (1) coupling plate, (2) hinges/mounting plates, (2) mounting plates, (2) guide rollers, (2) catches, (2) rollers, (2) roller brackets, (2) insert female screws, (2) g-type sliding tacks, & (1) adjustment bolt

Type M Kit Includes: (3) Slides, (1) synchronized board, (1) coupling plate, (3) hinges/mounting plates, (3) mounting plates, (3) guide rollers, (3) catches, (2) rollers, (2) roller brackets, (2) insert female screws, (2) g-type sliding tacks, & (2) adjustment bolts

Sold In: Per Kit

Min. Cab. Depth	Type S Item #	Type M Item #
16-1/4" + Door Thickness	SLALTST20D360S16	-
19-3/16" + Door Thickness	SLALTST20D360S19	SLALTST20D360M19
22-3/16" + Door Thickness	SLALTST20D360S22	SLALTST20D360M22
24-3/16" + Door Thickness	SLALTST20D360S24	SLALTST20D360M24
28-1/4" + Door Thickness	SLALTST20D360S28	SLALTST20D360M28



ALT-ST20-D360 Large (Type L) & X-Large (Type LL) Height Doors

- Hanging angle of the door can be adjusted to counteract and prevent door sag
- Type L door height: 63" - 78-3/4" / Type LL door height: 78-3/4" - 94-1/2"
- Type L/LL door sizes: thickness = 11/16"-1-3/16", maximum width = 24"
- Type L/LL door maximum weight: 44 lbs.


Type L Kit Includes: (4) Slides, (1) synchronized board, (1) coupling plate, (4) hinges/mounting plates, (4) mounting plates, (3) guide rollers, (3) catches, (2) rollers, (2) roller brackets, (2) insert female screws, (2) g-type sliding tacks, & (2) adjustment bolts

Type LL Kit Includes: (4) Slides, (1) synchronized board, (1) coupling plate, (5) hinges/mounting plates, (5) mounting plates, (3) guide rollers, (3) catches, (2) rollers, (2) roller brackets, (2) insert female screws, (2) g-type sliding tacks, & (2) adjustment bolts

Sold In: Per Kit

Min. Cab. Depth	Type L Item #	Type LL Item #
16-1/4" + Door Thickness	SLALTST20D360L16	SLALTST20D360LL16
19-3/16" + Door Thickness	SLALTST20D360L19	SLALTST20D360LL19
22-3/16" + Door Thickness	SLALTST20D360L22	SLALTST20D360LL22
24-3/16" + Door Thickness	SLALTST20D360L24	SLALTST20D360LL24
28-1/4" + Door Thickness	-	SLALTST20D360LL28

Lid Stays

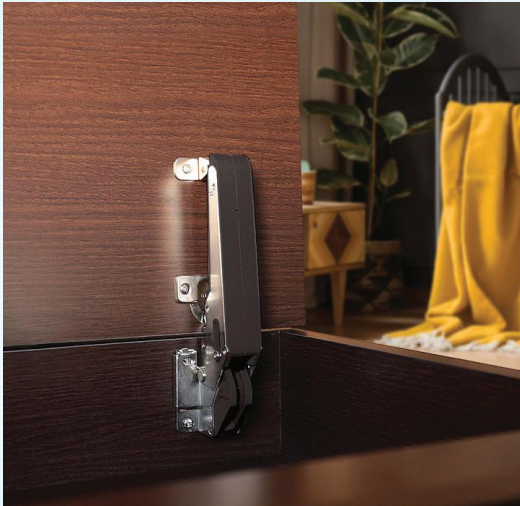

ARN-2 Lift-Assist Lid Stay w/Soft-Close (Top Opening)

- Designed for use with the OLYMPIA concealed hinge (360-D26-19)
- The lift-assist function allows for light opening of doors
- The free-stop function enables doors to hold in position (30°-Max.)
- The soft-close function makes doors close gently (0° -30° degrees)
- Integrated design combines a concealed hinge and lid stay, closing speed of doors is adjustable
- Torque Calculation: Torque = Door Height x 1/2 x Door Weight

Set Includes: (1) Aileron stay/mounting plate, (2) Olympia concealed hinges, (1) Olympia mounting plate, & 16 screws

Sold In: Per Set

Torque	Black Item #	Gray Item #
35.4-53.1 lbslin	SLARN-2-M-BL-S	SLARN-2-M-S
53.1-70.8 lbslin	SLARN-2-H-BL-S	SLARN-2-H-S



ARN-3 Lift-Assist Lid Stay w/Soft-Close (Upward Opening)

- Designed for use with the OLYMPIA concealed hinge (360-D26-19)
- The lift-assist function allows for light opening of doors
- The free-stop function enables doors to hold in position (30°-Max.)
- The soft-close function makes doors close gently (0° -30° degrees)
- Integrated design combines a concealed hinge and lid stay, closing speed of doors is adjustable
- Torque Calculation: Torque = Door Height x 1/2 x Door Weight

Set Includes: (1) Aileron stay/mounting plate, (2) Olympia concealed hinges, (1) Olympia mounting plate, & 16 screws

Sold In: Per Set

Torque	Black Item #	Gray Item #
35.4-53.1 lbslin	SLARN-3-M-BL-S	SLARN-3-M-S
53.1-70.8 lbslin	SLARN-3-H-BL-S	SLARN-3-H-S



SDS-C301N Soft-Down Stay (Upward Opening)

- Used with concealed, piano or butt hinges (sold separately)
- SDS-C301N is designed to hold door in closed and opened position
- Non-handed
- Torque Calculation: Torque = Door Height x 1/2 x Door Weight
- Per Piece: 35-60 lbs-inch
- Per Pair: 70-120 lbs-inch

Sold In: Per Each

Description	Black Item #	White Item #
Non-handed	SLSDS-C301N-BLK	SLSDS-C301N-WHT

Lid Stays



NSDX-10 Adjustable Soft-Down Stay (Downward-Opening)

- Used with piano, butt or drop hinges (sold separately)
- Designed to hold door in closed position
- Speed adjustment screw located on front for easy adjustment
- Torque Calculation: $\text{Torque} = \text{Door Height} \times 1/2 \times \text{Door Weight}$
- Per Piece: 19-60 lbs-inch
- Per Pair: 38-120 lbs-inch

Sold In: Per Each

Description	Left Side Item #	Right Side Item #
Downward-Opening	SLNSDX-10LK	SLNSDX-10RK



NSDX-20 Adjustable Soft-Down Stay (Top-Opening)

- Used with piano, butt or concealed hinges (sold separately)
- Opening angle 70° or 105°
- Designed to hold door in fully opened position
- Speed adjustment screw located on front for easy adjustment
- Torque Calculation: $\text{Torque} = \text{Door Height} \times 1/2 \times \text{Door Weight}$
- Per Piece: 19-60 lbs-inch
- Per Pair: 38-120 lbs-inch

Sold In: Per Each

Description	Left Side Item #	Right Side Item #
Top-Opening	SLNSDX-20LK	SLNSDX-20RK



NSDX-35 Adjustable Soft-Down Stay (Upward-Opening)

- Used with piano, butt or concealed hinges (sold separately)
- Opening angle 80°, 90° or 100°
- Designed to hold door in fully opened position
- Speed adjustment screw located on front for easy adjustment
- Torque Calculation: $\text{Torque} = \text{Door Height} \times 1/2 \times \text{Door Weight}$
- Per Piece: 19-60 lbs-inch
- Per Pair: 38-120 lbs-inch

Sold In: Per Each

Description	Left Side Item #	Right Side Item #
Upward-Opening	SLNSDX-35LK	SLNSDX-35RK

Lid Stays & Lift Assists



IF Inset Receding Door Mechanism (Upward-Opening)

Single Stay Type

- For upward-opening cabinet doors
- Soft-close feature prevents slamming, adjustable soft-closing speed
- Door pockets into the cabinet to get out of the way when opened
- Door weight: 3.1 ~ 5.5 lbs. / torque: 17 ~ 60 lbs-in / door width maximum: 23-5/8"
- Includes: (1) NSDX stay, (2) slides, (2) concealed hinges, & (2) hinge mounting plates

Sold In: Per Set

Door Height + Door Thickness	19/32"-13/16" Door Thickness Item #	11/16"-1-3/16" Door Thickness Item #
11-13/16" + T	SLIF-360S-14	SLIF-H360S-14
13-3/4" + T	SLIF-360S-16	SLIF-H360S-16
16-13/16" + T	SLIF-360S-19	SLIF-H360S-19
21-13/16" + T	SLIF-360S-24	SLIF-H360S-24



IF Inset Receding Door Mechanism (Upward-Opening)

Double Stay Type

- For upward-opening cabinet doors
- Soft-close feature prevents slamming, adjustable soft-closing speed
- Door pockets into the cabinet to get out of the way when opened
- Includes: (2) NSDX stays, (2) slides, (2) concealed hinges, & (2) hinge mounting plates
- Door weight: 5.9 ~ 11 lbs. / torque: 34 ~ 121 lbs-in / door width maximum: 47-1/4"

Sold In: Per Set

Door Height + Door Thickness	19/32"-13/16" Door Thickness Item #	11/16"-1-3/16" Door Thickness Item #
11-13/16" + T	SLIF-360W-14	SLIF-H360W-14
13-3/4" + T	SLIF-360W-16	SLIF-H360W-16
16-13/16" + T	SLIF-360W-19	SLIF-H360W-19
21-13/16" + T	SLIF-360W-24	SLIF-H360W-24



LADH Lift-Assist Damper (Heavy Duty)

- Add to counter tops in restaurants, bars and reception desks to prevent slamming
- Lift-Assist feature helps users lift a countertop, holds door open at 95 degrees
- Easy installation - surface mounted and can be retrofitted
- Torque Calculation: Torque = Door Height x 1/2 x Door Weight
- Includes: (1) lift-assist damper & (1) 23-5/8" stainless steel piano hinge

Sold In: Per Each

Torque	Dark Brown Item #	White Item #
221 ~ 309 lbslin	SLLADH-35	SLLADH-35WT
309 ~ 442 lbslin	SLLADH-50	SLLADH-50WT

Concealed Door Hinges




HES3D 3-Way Adjustable Concealed Hinge - 3/4" Cabinet Door

- 3-WAY adj. function allows vertical, horizontal, and depth adj. after hinge installed
- Max. Door Width: 23-5/8" x Max. Door Height: 47-1/4"
- Max. Door Weight for 2 Hinges: 19.8 lbs. / Max. Door Weight for 3 Hinges: 26.4 lbs.

Sold In: Per Each

Door Thickness	Black Item #	Dull Chrome Item #	Dull Nickel Item #
3/4"	SLHES3D-70BL	SLHES3D-70DC	SLHES3D-70DN

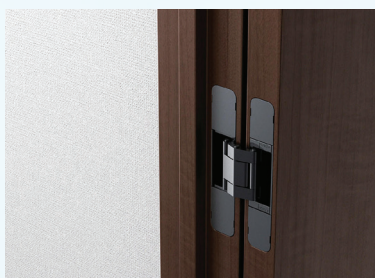


HES3D 3-Way Adjustable Concealed Hinge - 15/16" Cabinet Door

- 3-WAY adj. function allows vertical, horizontal, and depth adj. after hinge installed
- Max. Door Width: 23-5/8" x Max. Door Height: 59-1/16"
- Max. Door Weight for 2 Hinges: 26 lbs. / Max. Door Weight for 3 Hinges: 35 lbs.

Sold In: Per Each

Door Thickness	Black Item #	Dull Chrome Item #	Dull Nickel Item #
15/16"	SLHES3D-90BL	SLHES3D-90DC	SLHES3D-90DN

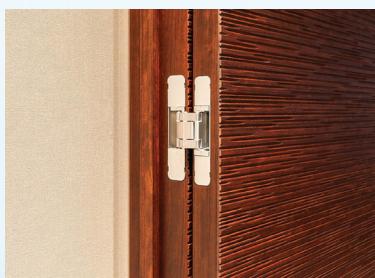

HES3D 3-Way Adjustable Concealed Hinge - 1-1/8" Cabinet Door

- 3-WAY adj. function allows vertical, horizontal, and depth adj. after hinge installed
- Max. Door Width: 35-7/16" x Max. Door Height: 94-1/2"
- Max. Door Weight for 2 Hinges: 66 lbs. / Max. Door Weight for 3 Hinges: 88 lbs.

Sold In: Per Each

Door Thickness	Black Item #	Dull Chrome Item #	Dull Nickel Item #
1-1/8"	SLHES3D-120BL	SLHES3D-120DC	SLHES3D-120DN



HES2S Concealed Hinge (Surface Mount) - 1-3/8" Passage Door

- 3D Adjustment: Adjust vertically, horizontally, and depth
- Max. Door Width: 35-7/16" x Max. Door Height: 106-5/16"
- Max. Door Weight for 2 Hinges: 88 lbs. / Max. Door Weight for 3 Hinges: 110 lbs.

Sold In: Per Each

Max. Opening Angle	Black Item #	Warm Gray Item #	White Item #
110°	SLHES2S150A110BL	SLHES2S150A110WGR	SLHES2S150A110WT



HES2S Concealed Hinge (Surface Mount) - 1-1/2" Passage Door

- Adjustable depth $\pm 1/8"$, vertical $\pm 1/8"$, horizontal with spacer $\pm 1/16"$
- Max. Door Width: 35-7/16" x Max. Door Height: 106-5/16"
- Max. Door Weight for 2 Hinges: 110 lbs. / Max. Door Weight for 3 Hinges: 143 lbs.

Sold In: Per Each

Max. Opening Angle	Black Item #	Dark Gray Item #	Light Gray Item #
125°	SLHES2S140A125BL	SLHES2S140A125DGR	SLHES2S140A125LGR

Concealed Door Hinges



HES3D-E 3-Way Adj. Concealed Hinge - 1-3/4" Passage Door

- 3-WAY adj. function allows vertical, horizontal, and depth adj. after hinge installed
- Compatible with 1-3/4" door thickness (minimum door thickness: 1-7/16")
- Max. Door Width: 35-7/16" x Max. Door Height: 94-1/2"
- Max. Door Weight for 2 Hinges: 121 lbs. / Max. Door Weight for 3 Hinges: 154 lbs.

Sold In: Per Each

Door Thickness	Black Item #	Dull Chrome Item #	Dull Nickel Item #
1-3/4"	SLHES3DE160BL	SLHES3DE160DC	SLHES3DE160DN



HES3D-E 3-Way Adj. Concealed Hinge w/UL - 1-3/4" Passage Door

- 3-WAY adj. function allows vertical, horizontal, and depth adj. after hinge installed
- UL Rated, up to 3 Hours
- Max. Door Width: 36" x Max. Door Height: 94-1/2" x Min. Door Thickness: 1-1/2"
- Max. Door Weight for 2 Hinges: 220 lbs. / Max. Door Weight for 3 Hinges: 275 lbs..

Sold In: Per Each

Door Thickness	Black Item #	Dull Chrome Item #	Dull Nickel Item #
1-3/4"	SLHES3D-E190BL-UL	SLHES3D-E190DC-UL	SLHES3D-E190DN-UL
Door Thickness	Polished Nkl Item #	White Item #	
1-3/4"	SLHES3D-E190PN-UL	SLHES3DE190WT-UL	



HES3D-W 3-Way Adj. Concealed Hinge w/UL - 1-5/8" Passage Door

For Door Moldings

- 3-WAY adj. function allows vertical, horizontal, and depth adj. after hinge installed
- Allows 3/8" clearance for flush installation or 1/2" clearance for installation with a molding
- UL Rated, up to 3 Hours
- Max. Door Width: 36" x Max. Door Height: 96-1/16"
- Max. Door Weight for 2 Hinges: 220 lbs. / Max. Door Weight for 3 Hinges: 275 lbs.

Sold In: Per Each

Door Thickness	Black Item #	Dull Chrome Item #	Dull Nickel Item #
1-5/8"	SLHES3D-W190BL-UL	SLHES3D-W190DC-UL	SLHES3D-W190DN-UL
Door Thickness	Polished Nkl Item #		
1-5/8"	SLHES3D-W190PN	***Note: Polished Nickel Item is not UL listed**	



HGS3D-S160SH 3-Way Adj. Concealed Hinge - 1-7/16" Passage Door

Made of 304 Stainless Steel

- 3-WAY adj. function allows vertical, horizontal, and depth adj. after hinge installed
- Max. Door Width: 36" x Max. Door Height: 96"
- Max. Door Weight for 2 Hinges: 176 lbs. / Max. Door Weight for 3 Hinges: 220 lbs.

Sold In: Per Each

Door Thickness	Item #	Round Cover Item #	Square Cover Item #
1-7/16"	SLHGS3D-S160SH	SLHGS3DS160SHRDPL	SLHGS3DS160SHSQPL

Lateral Opening Door Systems



LIN-X1000 Lateral Opening Door Systems - Flush

- Flush finish when doors are closed
- Lateral opening allows doors to swing within a small radius
- 4-way adjustable horizontally, vertically, for depth, and for parallel adjustment
- Designed with soft close to prevent door from slamming shut
- Door Width: 29-1/2" - 43-5/16" / Max. Door Height: 117-5/16" / Door Thickness: 15/16" - 1-9/16"
- Max Door Weight: 198 lbs.

Kit includes: (1) Upper Arm, (1) lower arm, (4) covers from mounting plate (hinge side), (4) covers for mounting plates (door side), (1) damper for opening, & (1) 78.74" aluminum connecting bar

Sold In: Per Kit

Black Item #	White Item #
SLLINX1000BLS	SLLINX1000WTS



LIN-X800 Lateral Opening Tall Door Systems - Overlay

- Designed for overlay installation, but can be installed flush
- Lateral opening allows doors to swing within a small radius
- 4-way adjustable horizontally, vertically, for depth, and for parallel adjustment
- Designed with soft close to prevent door from slamming shut
- Hardware is non-handed, can be used for left or right opening doors
- Door thickness: 15/16" - 1-9/16" / max. door weight: 88 lbs. per door

Kit includes: (2) Arms, (4) washer covers (hanging side), (4) washer covers (leading edge), (2) rod covers, & (1) 82.68" connecting rod (for 94-1/2" height) or (1) 98.43" connecting rod (for 117-5/16" height)

Sold In: Per Set

Door Width	Door Height	Black Item #	White Item #
29-1/2" - 33-7/16"	94-1/2"	SLLINX800BLS	SLLINX800WTS
29-1/2" - 33-7/16"	117-5/16"	SLLINX800HBLS	SLLINX800HWTS



LIN-X Lateral Opening Short Door Systems - 3/4" Overlay


- Lateral opening allows doors to swing within a small radius
- 4-way adjustable horizontally, vertically, for depth, and for parallel adjustment
- Designed with soft close to prevent door from slamming shut
- Hardware is non-handed, can be used for left or right opening doors
- LIN-X450 max. door weight: 15.4 lbs. / LIN-X600 max. door weight: 19.8 lbs.

Kit includes: (2) Arms, (2) mounting plates, (2) cup covers, (2) bar end caps & (1) connecting bar

Sold In: Per Set

Door Width	Door Height	Door Thickness	Nickel Item #
15-3/4" - 19-11/16"	23-5/8" - 35-7/16"	5/8" - 15/16"	SLLINX450
21-5/8" - 25-9/16"	23-5/8" - 35-7/16"	5/8" - 15/16"	SLLINX600

Concealed Cabinet Hinges

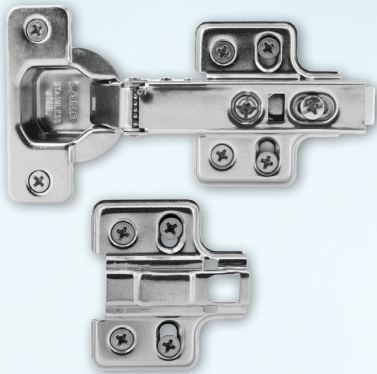

180SUS Stainless Steel Concealed Hinge w/Soft or Self Close - Overlay

- 304 Stainless steel hinge body construction allows for usage in outdoor environments
- Passed 500 hour salt spray test
- Resin casing protects damper from corrosive elements
- Door thickness: 9/16" - 13/16"

Sold In: Per Each

Overlay	Opening	Soft-Close Item #	Self-Close Item #
15mm - 19mm	105°	SL180SUS-D46-19T	SL180SUS-C46-19T
Description	Item #		
SS Mounting Plate	SL180SUS-P6T		




304 Stainless Steel Concealed Hinge - Overlay

- All-stainless steel cup hinge for superior corrosion resistance, made of 304 stainless steel
- NSF component

Sold In: Per Each

Swing Type	9mm Overlay Item #	14mm Overlay Item #	19mm Overlay Item #
Free Swinging	SL304B-46/9	SL304B-46/14	SL304B-46/19
Self-Close	SL304B-C46/9	SL304B-C46/14	SL304B-C46/19
Description	Straight Item#	2D Wing Item#	3D Wing Item#
Mounting Plate	SL304B-P3A	SL304B-P4A/32	SL304B-P4A/32-3W



Inset




Overlay

Olympia Concealed Hinge - Inset & Overlay

- Soft-Close hinges feature 5-speed adjustable damper
- Load capacity: 13.2 lbs/2 pcs, 22 lbs/3 pcs
- Max. door width: 23-5/8" / max. door thickness: 13/16"
- Inset opening angle: 93° / overlay opening angle: 105°

Sold In: Per Each


Type	Free Swinging Item #	Self-Close Item #	Soft-Close Item #
Inset	SL360-26-0T	SL360-C26-0T	SL360-D26-0T
9mm Overlay	SL360-26-9T	SL360-C26-9T	SL360-D26-9T
14mm Overlay	SL360-26-14T	SL360-C26-14T	SL360-D26-14T
19mm Overlay	SL360-26-19T	SL360-C26-19T	SL360-D26-19T



Mounting Plate



Angle Limiter



Spacer

Olympia Mounting Plates w/2-Holes / Angle Limiter / Spacer

- Designed to be used with Olympia hinges


Sold In: Per Each

Description	Type	Height Adjustment	Item #
Mounting Plate	Standard	+/-2.5mm	SL360-P4W-32T
Mounting Plate	+5mm	+/-2.5mm	SL360-P4W-32T-5
Description	Item #		
85° Angle Limiter	SL360-85		
Spacer for metal door	SL360-BCS		

Concealed Cabinet Hinges & Drop Lid Hinges



Black Nickel




Nickel

J95 Heavy Duty Concealed Hinges - Inset & Overlay


- Available: Free Swing or Self Close
- Load capacity: 55 lbs/2 pcs, 88 lbs/3 pcs
- Max. door width: 31-1/2"/2 pcs, 35-7/16"/3 pcs.
- 3-way adjustment with door installed

Sold In: Per Each

Type	Black Nickel Free Swinging Item #	Nickel Free Swinging Item #	Black Nickel Self-Close Item #	Nickel Self-Close Item #
Inset	SLJ95-24-0T-BN	SLJ95-24-0T-NI	SLJ95-C24-0T-BN	SLJ95-C24-0T-NI
16mm Overlay	SLJ95-24-16T-BN	SLJ95-24-16T-NI	SLJ95-C24-16T-BN	SLJ95-C24-16T-NI
25mm Overlay	SLJ95-24-25T-BN	SLJ95-24-25T-NI	SLJ95-C24-25T-BN	SLJ95-C24-25T-NI



**Black
Nickel**



Nickel

J95 Mounting Plates w/4-Holes

- Designed to be used with J95 hinges
- Vertical adjustment: $\pm 1/8"$ (± 3 mm) / Overlay adjustment: $\pm 5/32"$ (± 0.4 mm)
- Depth adjustment: $\pm 5/32"$ (± 1.5 mm)

Sold In: Per Each

Black Nickel Item #	Nickel Item #
SLJ95-P6T-BN	SLJ95-P6T-NI



Black Nickel



Nickel

J160-D22 Heavy Duty Specialty Hinges w/Soft-Close - Overlay

- 3-way adjustability with built-in damper
- Load capacity: 55 lbs/2 pcs, 88 lbs/3 pcs.
- Max. door width: 31-1/2"/2 pcs, 35-7/16"/3 pcs.
- Wide-opening hinge allowing 160° opening
- Recommended door thickness: 1 1/16" ~ 1-7/16"
- Includes mounting plates and screw covers
- Built in damper allows doors to soft-close

Sold In: Per Each

Overlay	Black Nkl Item #	Nickel Item #
25mm	SLJ160-D22-25T-BN	SLJ160-D22-25T-NI



SDH-P Drop Lid Hinges

- 3-way adjustment (overlay, horizontal, door gap)
- Flush when opened
- Can be used with soft down stay NSDX-10
- Door Thickness: 5/8" - 25/32"
- Overlay Coverage: 5/8" - 3/4"

Sold In: Per Each

Overlay	Black Item #	Nickel Item #	White Item #
25mm	SLSDH-PBL	SLSDH-PNI	SLSDH-PWT

Ball Bearing Drawer Slides & Folding Brackets



ESR-DC4513 Stainless Steel Slides - Full Extension

- Front disconnect, positive stop, hold-in detent, non-handed
- Made of 304 stainless steel

Sold In: Per Pair

Slide Length	Item #	Slide Length	Item #
7-7/8"	SLESR-DC4513-8	19-11/16"	SLESR-DC4513-20
9-27/32"	SLESR-DC4513-10	21-21/32"	SLESR-DC4513-22
11-13/16"	SLESR-DC4513-12	23-5/8"	SLESR-DC4513-24
13-25/32"	SLESR-DC4513-14	25-19/32"	SLESR-DC4513-26
15-3/4"	SLESR-DC4513-16	27-9/16"	SLESR-DC4513-28
17-23/32"	SLESR-DC4513-18		



Black



Aluminum

388 Folding Brackets - Aluminum

- Automatically locks when flap is in opened position, press lever to release the lock
- For panel thickness: 19/32"-1-3/8"

Required Quantity:

- Width up to 23-5/8" - 1 pc
- Width 23-5/8" - 51-3/16" - 2 pcs

- Made of aluminum

Sold In: Per Each

Ext. Length	Load Capacity	Aluminum Item #	Black Item #
7-1/16"	77 lbs.	SL38820-25	SL38820/25/BLK
10-7/8"	121 lbs.	SL38830-25	SL38830/25/BLK
16-15/16"	132 lbs.	SL38845-25	SL38845/25/BLK
23-1/16"	176 lbs.	SL38860-25	SL38860/25/BLK



Black



Stainless Steel

EB Folding Brackets - Stainless Steel

- Automatically locks when flap is in opened position, press lever to release the lock
- Bracket can be used without the need for hinges
- NSF Component, made of 304 stainless steel

Sold In: Per Each

Length	Load Capacity	Black Item #	Stainless Steel Item #
7-55/64"	198 lbs.	SLEB-200-EP-BL	SLEB-200-EP
12-1/16"	165 lbs.	SLEB-303-EP-BL	SLEB-303-EP
12-1/2"	220 lbs.	SLEB-317-EP-BL	SLEB-317-EP

EB Folding Brackets w/Soft-Close

Length	Load Capacity	Black Item #	Stainless Steel Item #
12-1/16"	165 lbs.	SLEB-303-EP-BL-D	SLEB-303-EP-D
12-1/2"	220 lbs.	SLEB-317-EP-BL-D	SLEB-317-EP-D

Door Straighteners & Hasps



DSR701 Door Straighteners - Recessed/Surface

- Installed post-production to fix warped doors
- Must run complete height of door
- Can be partially recessed or surface mounted to the back of the door
- +/-10mm adjustment can be made from the top of the door with a M4 Allen Key (not included)
- Minimum door thickness: 5/8"
- Requires M4 (U.S. #8) flathead wood countersunk screws for partially recessed installation or wood panhead screws for surface installation
- Can be cut from the bottom up to 15-3/4"

Sold In: Per Pack (10 Per Pack)

Length (Min.-Max.)	Black Item #	Silver Item #
56-5/16" - 72-1/16"	SLDSR7011830B10	SLDSR7011830S10
70-7/8" - 86-5/8"	SLDSR7012200B10	SLDSR7012200S10



HP Stainless Steel Hasps (Screw-On) - 304 Stainless Steel

- Polished stainless steel finish
- NSF component

Sold In: Per Each

Length	Item #	Length	Item #
1-37/64"	SLHP-40	2-61/64"	SLHP-75
1-31/32"	SLHP-50	3-15/16"	SLHP-100
2-9/16"	SLHP-65	4-23/32"	SLHP-120



HP Stainless Steel Hasps (Screw-On) - 304/316 Stainless Steel

- Polished stainless steel finish
- NSF component

Sold In: Per Each

Length	Item #
3-1/2"	SLHP635S
4-1/2"	SLHP645S
6-1/16"	SLHP660S



HP Stainless Steel Hasps (Weld-On) - 304/316 Stainless Steel

- Polished stainless steel finish
- NSF component

Sold In: Per Each

Length	Item #
3-1/2"	SLHP-635
4-1/2"	SLHP-645
6-1/16"	SLHP-660

Magnetic Catches



MC-159 Magnetic Catches - Ultra Thin

- Max. temperature: 176 °F / to avoid breakage, counterplate should not hit magnet
- Screw heads should not protrude above the base plate

Sold In: Per Each. **NOTE:** Counterplate sold separately.

Description	Black Item #	Nickel Item #	Size
8.8 lbs. Mag. Force	SLMC-159-BL	SLMC-159	1-39/64"L x 21/32"W x 7/64"H
Counterplate	-	SLMC-159-PLATE	1-3/16"L x 5/8"W x 1/16"H



MC-159SUS Magnetic Catches - Ultra Thin (430 Stainless Steel)

- Max. temperature: 176 °F / to avoid breakage, counterplate should not hit magnet
- Screws not included; use M3 flat head or equivalent

Sold In: Per Each. **NOTE:** Counterplate sold separately.

Description	Nickel Item #	Size
11 lbs. Mag. Force	SLMC-159-SUS	1-5/8"L x 21/32"W x 7/64"H
Counterplate	SLJM49	



MC-JM45



MC-JM50



JM49

MC-JM Sealed Magnetic Catches

- Hermetically sealed, ideal for high corrosion environments
- No metal-to-metal contact, ideal for cleanroom applications
- NSF component

Sold In: Per Each. **NOTE:** Counterplate sold separately.

Description	Black Item #	White Item #	Size
6.6 lbs. Mag. Force	SLMC-JM45BL	SLMC-JM45WT	1-49/64"L x 43/64"W x 7/32"H
6.6 lbs. Mag. Force	SLMC-JM50BL	SLMC-JM50WT	1-31/32"L x 53/64"W x 33/64"H
Description	Item #	Size	
Counterplate: equivalent to 304SS	SLJM49	1-59/64"L x 19/32"W x 5/64"H	



MC-YN001P Magnetic Catch - Ultra Thin

- Max. temperature: 176 °F / to avoid breakage, counterplate should not hit magnet
- Screw heads should not protrude above the base plate
- Counterplate included

Sold In: Per Each

Description	Nickel Item #	Size
5.9 lbs. Mag. Force	SLMCYN001P	1-49/64"L x 43/64"W x 7/32"H
Counterplate	SLMC-YN001U	1-3/8"L x 9/16"W x 1/16"H

Touch Latches



ML80/ML120 Magnetic Touch Latches

- Push to latch/unlatch, eliminates need for handles or knobs
- NOTE: allow a 3.5 mm (1/8") gap between door and cabinet frame for pushing room

Sold In: Per Each

Mag. Force	Black Item #	Brown Item #	White Item #	Size
3.5 lbs.	SLML80-BLK	SLML80-BRN	SLML80-WHT	1-23/32"L x 1-27/64"W x 19/32"H
5.3 lbs.	SLML120-BLK	SLML120-BRN	SLML120-WHT	2-3/4"L x 1-13/16"W x 21/32"H




ML-ZN80 Push-To-Open Touch Latches

- For doors up to 36" x 96" with a push force of 11 lbs.
- Magnet allows tolerance with 1.5° swivel
- Hidden Mounting Screw Design for clean appearance and easy installation
- Can push open doors up to 275 lbs.

Sold In: Per Each

Mag. Force	Black Item #	Brown Item #	White Item #	Size
6.6 lbs.	SLML-ZN80-BL	SLML-ZN80-BR	SLML-ZN80-WT	2-3/16"L x 1-9/16"W x 7/8"H

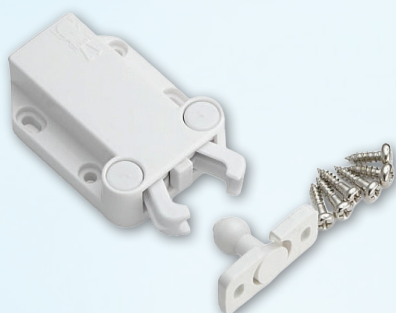

MC-37 Non-Magnetic Touch Latches

- Push to latch/unlatch, strong retaining force
- Floating strike allows for easy alignment
- For overlay door, allow 1/8" (3 mm) gap between door and cabinet frame for push space
- Pulling the door with excessive force without unlatching the unit may damage the mechanism
- Constant loading of over 4 kgf or excessive pushing or pulling is not recommended

Sold In: Per Each

Retaining Force	Black Item #	Brown Item #	White Item #	Size
17.6 lbs.	SLMC37-BL	SLMC37-BN	SLMC37-WH	2-1/4"L x 1-9/16"W x 5/8"H

Hooks




TF Wire Hooks - Stainless Steel

- Made of 304 stainless steel with a polished stainless steel finish

Sold In: Per Each

Item #	Load Capacity	Size
SLTF-20	6.6 lbs.	13/16"D x 25/32"H
SLTF-30	15.4 lbs.	1-5/32"D x 1-1/32"H
SLTF-35	26.0 lbs.	1-19/32"D x 1-3/8"H

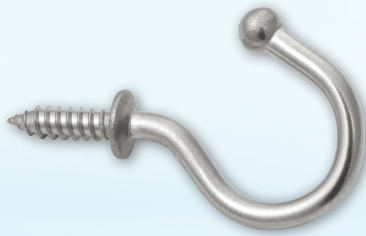

TL Wire Hooks - Stainless Steel

- Made of 304 stainless steel with a polished stainless steel finish

Sold In: Per Each

Item #	Load Capacity	Size
SLTL-15	11 lbs.	21/32"D x 19/32"H
SLTL-20	11 lbs.	29/32"D x 25/32"H
SLTL-30	11 lbs.	1-5/32"D x 63/64"H
SLTL-40	26 lbs.	1-19/32"D x 1-11/32"H



TY Wire Hooks - Stainless Steel

- Made of 304 stainless steel with a polished stainless steel finish
- NSF component

Sold In: Per Each

Item #	Load Capacity	Size
SLTY-20	6.6 lbs.	55/64"D x 35/64"H
SLTY-25	6.6 lbs.	1-1/16"D x 43/64"H
SLTY-30	15.4 lbs.	1-7/32"D x 25/32"H
SLTY-35-15	15.4 lbs.	1-7/16"D x 29/32"H
SLTY-40-15	17.6 lbs.	1-23/32"D x 1-1/16"H



TK Swing Hooks - Stainless Steel

- Made of 304 stainless steel with a polished stainless steel finish
- Swivels 180 degrees
- Hook has constant torque when swiveling
- Ideal for vibration or shock applications

Sold In: Per Each

Without Friction Item #	With Friction Item #	Load Capacity	Size
SLTK-30	SLTK-30F	26 lbs.	59/64"D x 1-27/64"H
SLTK-45	SLTK-45F	17 lbs.	1-1/8"D x 1-3/4"H

Edge Pulls



Matte Black



Mirror



Satin

SN Edge Pulls - Stainless Steel

- Made of 304 stainless steel
- Used in bathrooms, kitchens, or outdoor cabinetry
- Projection: 38mm
- NSF component

Sold In: Per Each

Matte Black Item #	Mirror Item #	Satin Item #	Number of Holes	C/C	Overall Length
SLSN-50-BL	SLSN-50-M	SLSN-50-S	2	30mm	50mm
SLSN-70-BL	SLSN-70-M	SLSN-70-S	2	46mm	70mm
SLSN-95-BL	SLSN-95-M	SLSN-95-S	2	65mm	95mm
SLSN-120-BL	SLSN-120-M	SLSN-120-S	3	45mm	120mm
SLSN-150-BL	SLSN-150-M	SLSN-150-S	3	57mm	150mm



Antique Brass

Bright Brass



Satin Brass

SNB Edge Pulls - Brass

- Made of quality brass
- Projection: 38mm

Sold In: Per Each

Antique Brass Item #	Bright Brass Item #	Satin Brass Item #	Number of Holes	C/C	Overall Length
SLSNB-50AB	SLSNB-50BB	SLSNB-50SB	2	30mm	50mm
SLSNB-70AB	SLSNB-70BB	SLSNB-70SB	2	46mm	70mm
SLSNB-95AB	SLSNB-95BB	SLSNB-95SB	2	65mm	95mm
SLSNB-120AB	SLSNB-120BB	SLSNB-120SB	3	45mm	120mm
SLSNB-180AB	SLSNB-180BB	SLSNB-180SB	3	70mm	180mm



Mirror



Mirror




Mirror

SND Edge Pulls - Stainless Steel

- Made of 304 stainless steel
- Projection: 60mm
- NSF component

Sold In: Per Each

Mirror Item #	Number of Holes	C/C	Overall Length	NSF Component
SLSND-50M	2	30mm	50mm	Yes
SLSND-70M	2	46mm	70mm	Yes
SLSND-95M	2	65mm	95mm	Yes
SLSND-120M	3	45mm	120mm	No
SLSND-150M	3	57mm	150mm	No

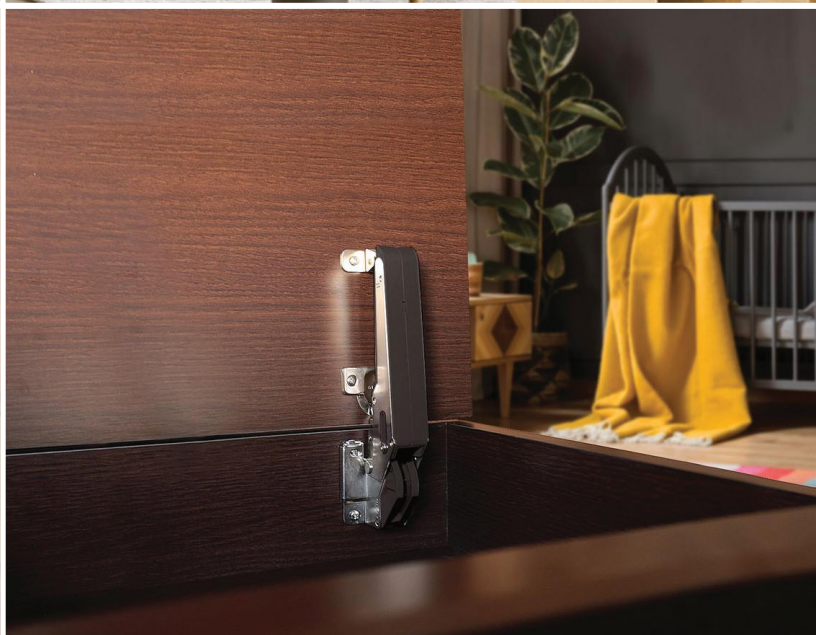

WÜRTH BAER SUPPLY COMPANY

Sugatsune Premium Hardware Catalog

Würth Baer Supply Company

909 Forest Edge Drive
Vernon Hills, IL 60061
T: 800-289-2237
F: 888-558-2237
www.wurthbaersupply.com

Source Code: BP4450

Other locations:

Bensenville, IL
Bethlehem, PA
Brooklyn Heights, OH
Columbus, OH
Des Moines, IA
Eagan, MN
Edison, NJ
Harrisburg, PA
Indianapolis, IN

Kansas City, MO
Leetsdale, PA
Londonderry, NH
Middletown, OH
Oak Park, MI
Omaha, NE
Pennsauken, NJ
Pleasant Hill, IA
Plymouth, MN

Reading, PA
Rumford, RI
Sanford, NC
Sioux Falls, SD
Syracuse, NY
Versailles, KY
West Haven, CT
Williamsport, PA
Wilmington, DE